

MGEX Clock Determination at CODE

E. Orliac, L. Prange, R. Dach, S. Schaer and A. Jäggi

Astronomical Institute of University of Bern (AIUB)
Bern, Switzerland

IGS Workshop on GNSS Biases
5–6 November 2015
University of Bern, Switzerland

contact: etienne.orliac@aiub.unibe.ch

Presentation Outline

- Overview of CODE MGEX orbit and clock solutions
- Bias handling in the clock estimation
- Inter-system biases stability
- Conclusions and outlook

CODE MGEX Orbit Solution


GNSS considered:	GPS + GLONASS + Galileo + BeiDou (MEO+IGSO) + QZSS (70 SV)
Processing mode:	post-processing / 2 weeks delay (since 2015)
Timespan covered:	GPS-weeks 1689 - today
Number of stations:	130 (GPS), 110 (GLONASS), 85 (Galileo); 55 (BeiDou); 20 (QZSS)
Processing scheme:	double-difference network processing (observable: phase double differences)
Signal frequencies:	L1+ L2 (GPS + GLO+ QZSS); E1 (L1) + E5a (L5) GAL; B1 (L1) + B2 (L7) BeiDou
Orbit characteristic:	3-day long arcs; RPR: ECOM / ECOM2 (since 2015)
Reference frame:	IGS08 (until week 1708); IGB08 (since week 1709)
IERS conventions:	IERS2003 (until 1705); IERS2010 (since 1706)
Product list:	daily orbits (SP3) and ERPs
Distribution:	ftp://cddis.gsfc.nasa.gov/gnss/products/mgex/
Designator:	comwwwwd.???Z

CODE MGEX Clock Solution

GNSS considered:	GPS + GLONASS + Galileo + BeiDou + QZSS (70 SV)
Processing mode:	post-processing / 2 weeks delay (since 2015)
Timespan covered:	GPS-weeks 1710 - today
Number of stations:	130 (GPS), 35 (GLO), 45 (Galileo); 50 (BeiDou); 20 (QZSS)
Processing scheme:	zero-difference network processing (observable: code+phase undifferenced)
Signal frequencies:	L1+ L2 (GPS + GLO+ QZSS); E1 (L1) + E5a (L5) GAL; B1 (L1) + B2 (L7) BeiDou
A priori information:	orbits, ERPs, coordinates, and troposphere from CODE MGEX orbit solution introduced as known
Reference frame:	IGb08
IERS conventions:	IERS2010
Product list:	epoch-wise (300s) satellite and station clock corrections in daily clock RINEX files; daily inter-system biases for mixed stations in Bernese DCB and BIAS-SINEX (BIA) format
Distribution:	ftp://cddis.gsfc.nasa.gov/gnss/products/mgex/
Designator:	comwwwwd.???.Z

CODE MGEX solutions

- Stations providing RINEX3 included in CODE's data monitoring

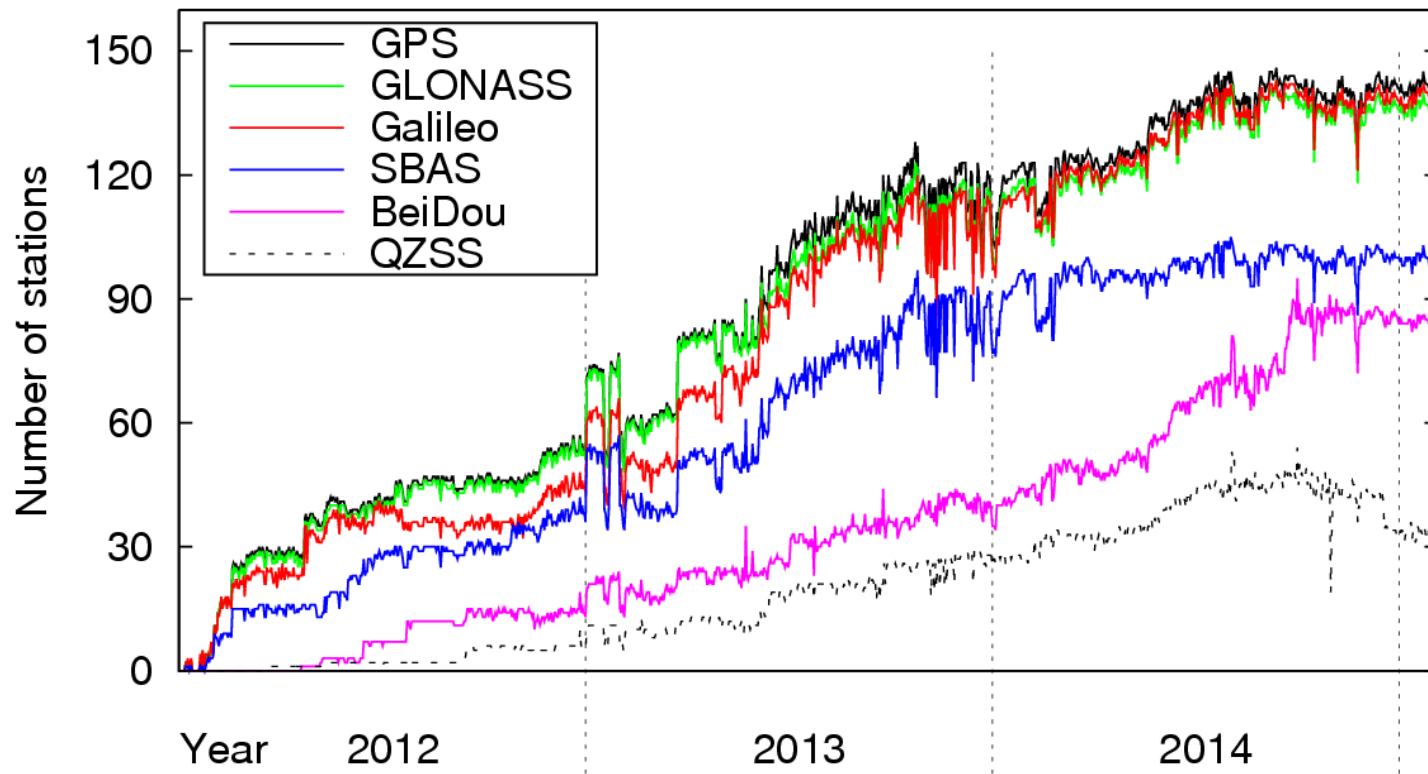

Biases handling in the clock procedure

- Inter-system biases (ISB) are setup for each station and GNSS
- ISBs are the lumped sum of:
 - Systems time difference
 - DCBs
 - Inter-frequency biases (specific to GLONASS)
- Each GLONASS satellite is treated as an individual system
- ISBs are estimated session-wise (daily)
- For each GNSS, a zero-mean condition is applied over all tracking stations
- => Investigate the time variability of these ISBs

ISB reference unification


- ISB reference realized with a zero-mean condition each day for each system
- ISB daily references need therefore to be unified first
- Achieved by selecting a reference station for each GNSS and assume constant (zero) ISB over time
 - + Most stable station can be selected
 - + Not affected by less stable stations
 - The selected station has to be available on each day
 - Any artefact contained in the reference will be transferred to all others stations

=> may be necessary to select different references on sub-intervals

ISB reference unification


- But the high variability in of the sub-networks observing each GNSS prevented to identify acceptable reference ISB over long periods
 - ⇒ After some iterations, the full year was divided in 15-day periods over which a reference is chosen for each GNSS
- Over each period the reference ISB site is chosen as the one that minimizes the sum of the RMS of the others.

ISB reference unification

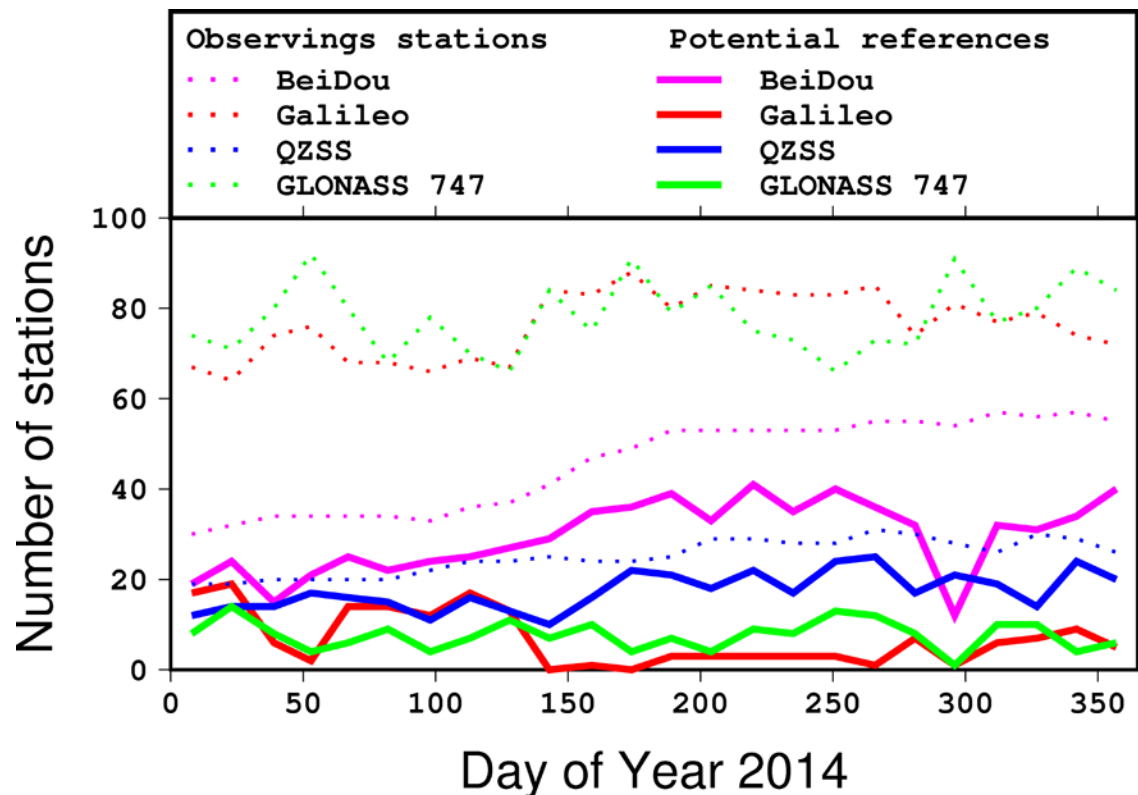

- Even on 15-day periods, the situation is not always comfortable in terms of pool of potential reference sites


ISB reference unification

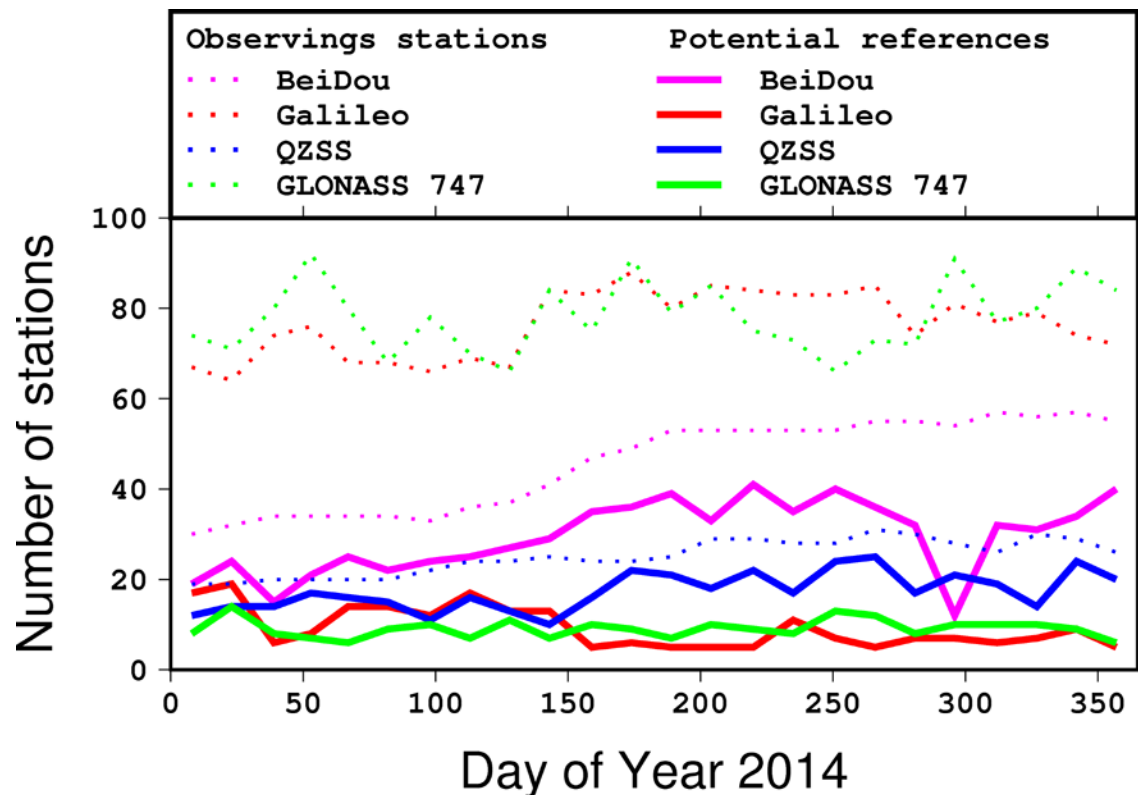

- To relax the system uncomplete references were added to have a least 5 potential references to chose from.

Events in ISB time series

- Time series were splitted in case of receiver swap.
- Firmware upgrades (according to sitelogs) may impact the timeseries, but not systematically

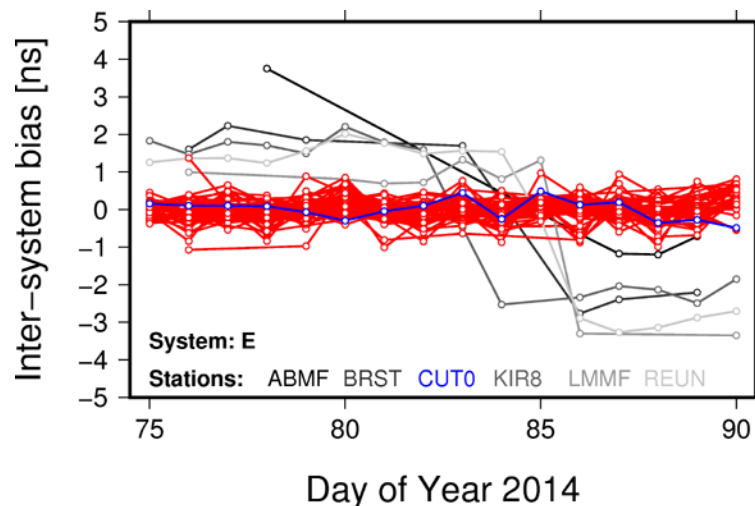





6 stations equipped with TRIMBLE NETR9 with same firmware upgrade from version 4.80 to 4.85.

- Since impracticable to examine individually the time series, a generic screening was performed.
- Note that a jump only impacts the periods it belongs to.

Orliac et al.: MGEX Clock Determination at CODE, IGS Bias WS, Bern, 2015




Stacked ISB time series

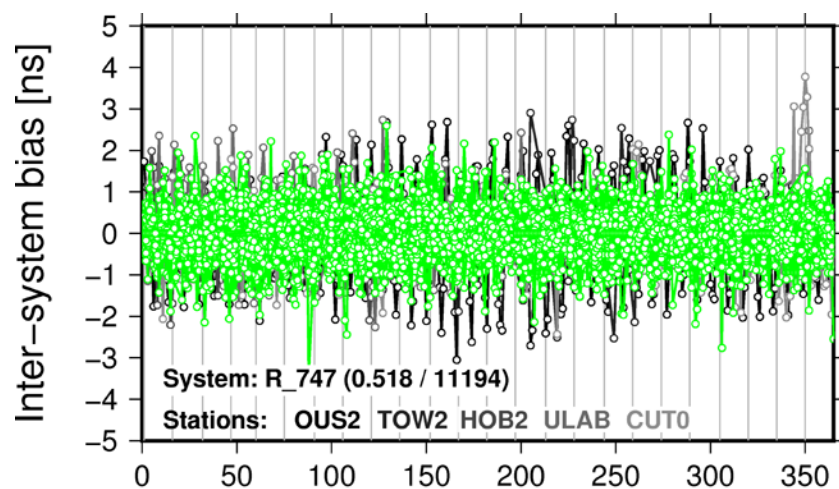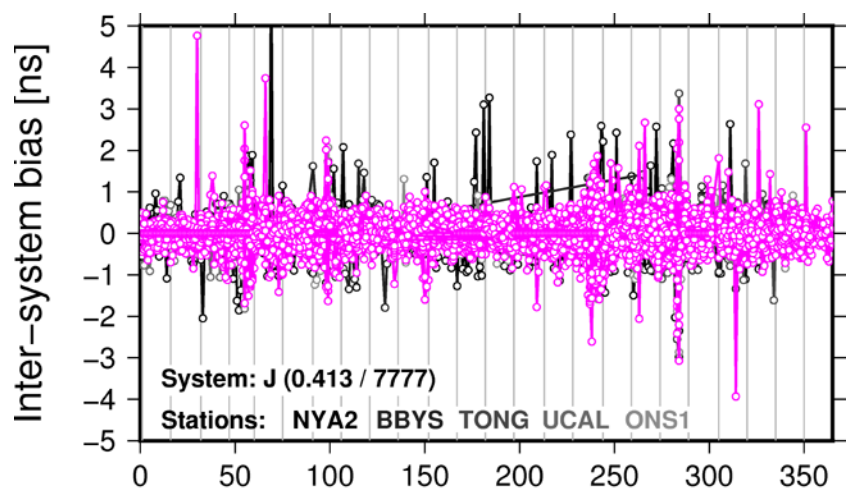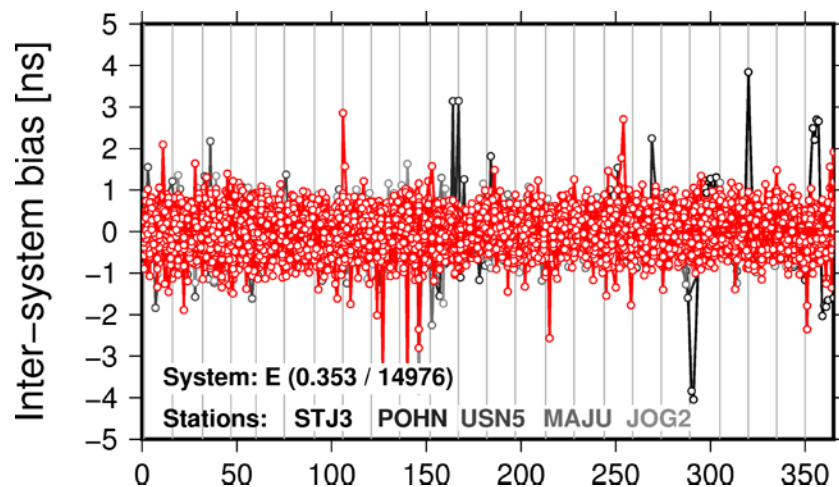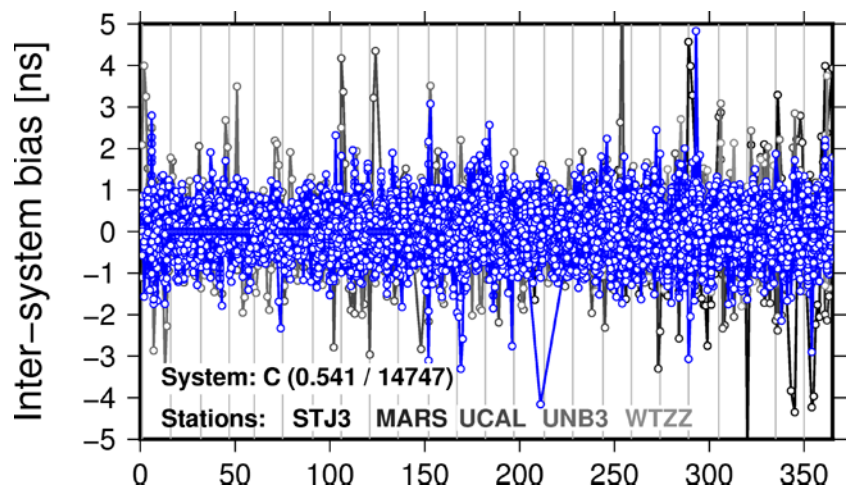

Day of Year 2014


Day of Year 2014

ISB stability: overview

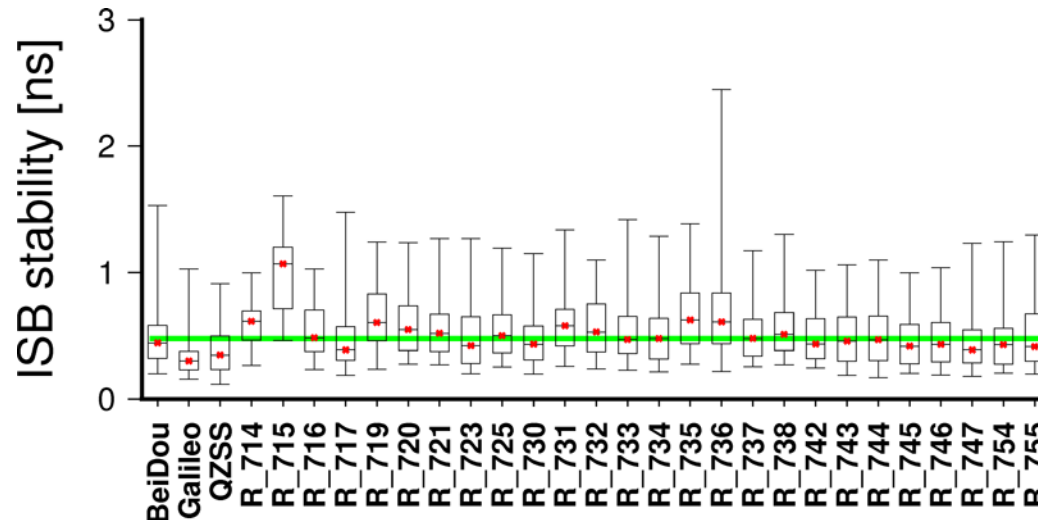





- Galileo & QZSS have 75 % of their stations below the overall median (0.476 ns).
- Apart from GLONASS R_715, all systems have their median value close to that of the overall median.
- Still apart R_715, the minimum values are similar over all systems.
- R_736 shows largest ISB stability spread.

ISB stability over receiver types




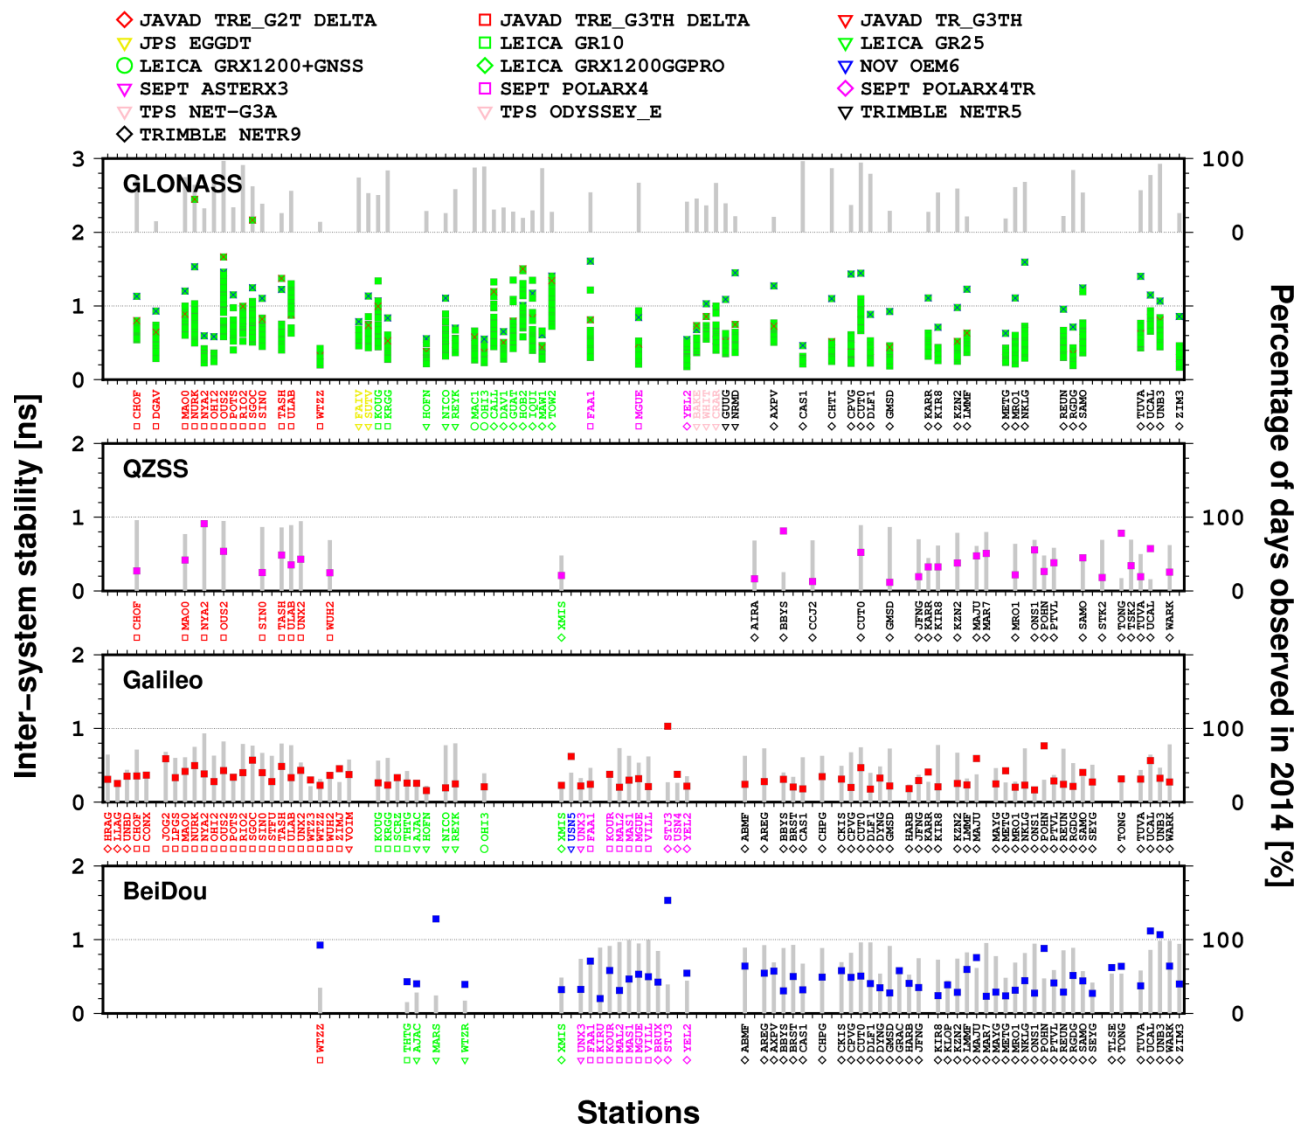


- ISB per brand and type
- No dependency observed
- No dependency either on time series length
- Some predominant receiver types
- R_715 and R_736 generally represent the least stable systems for GLONASS tracking stations





ISB periodicities

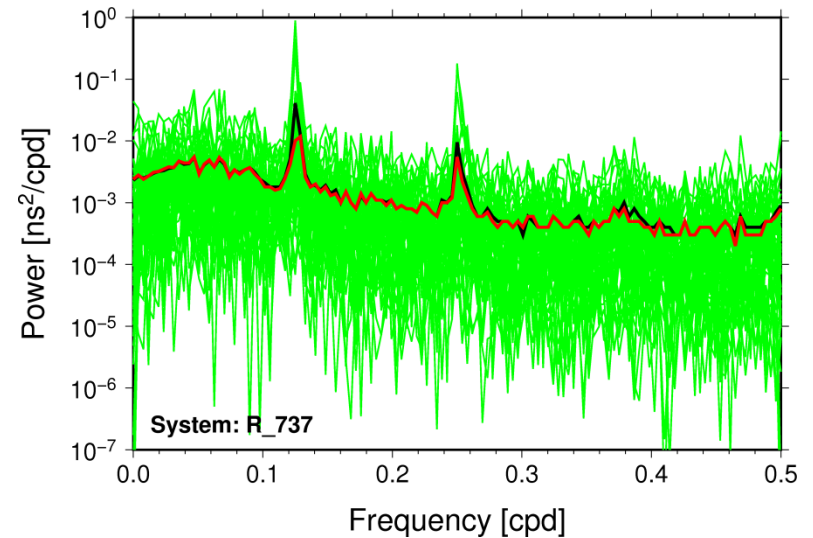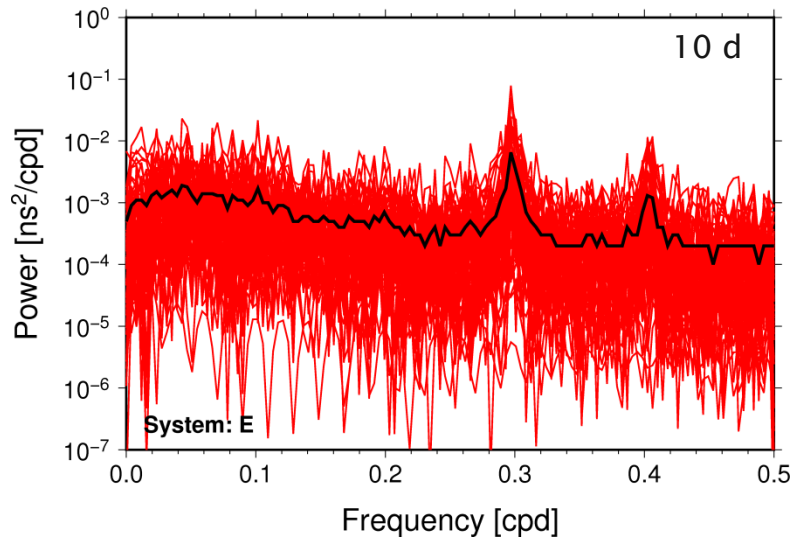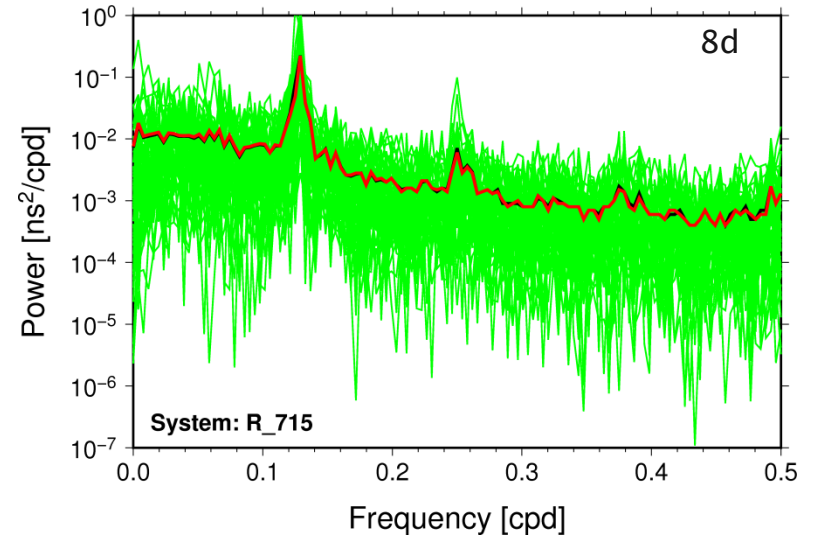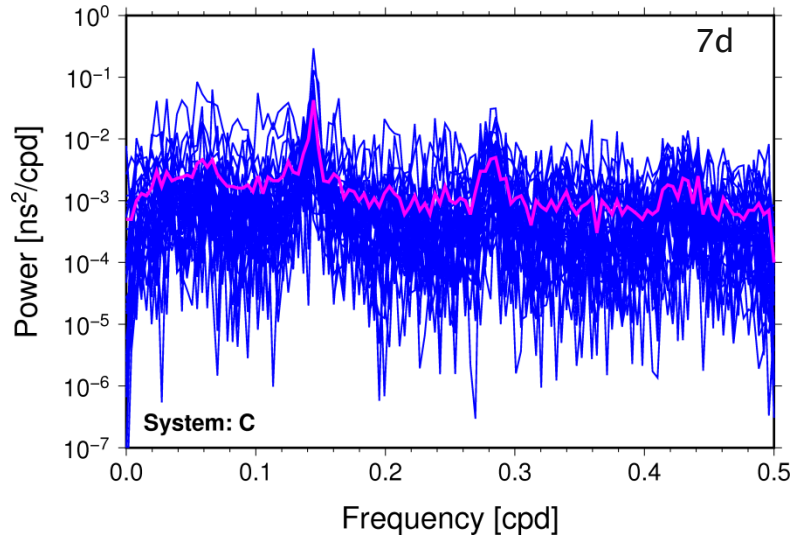





Building long clock time series: Galileo

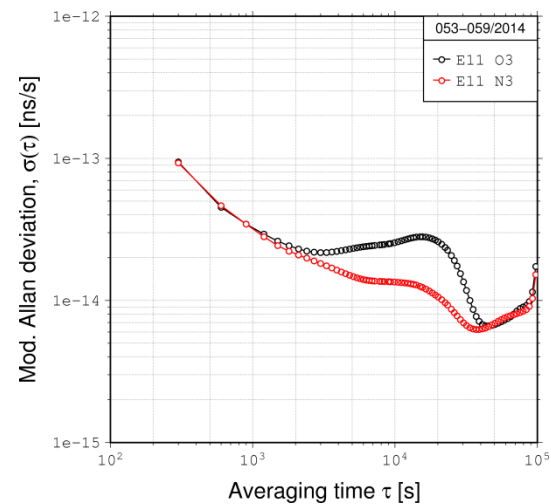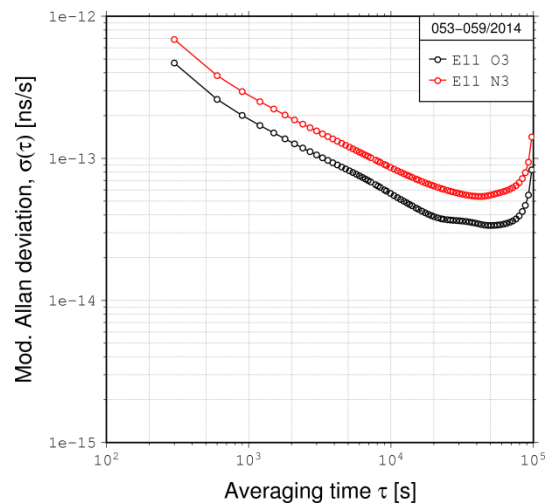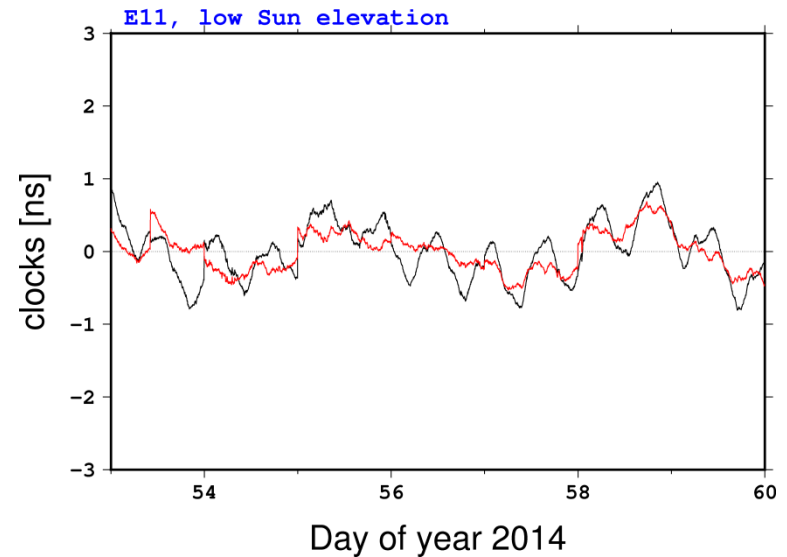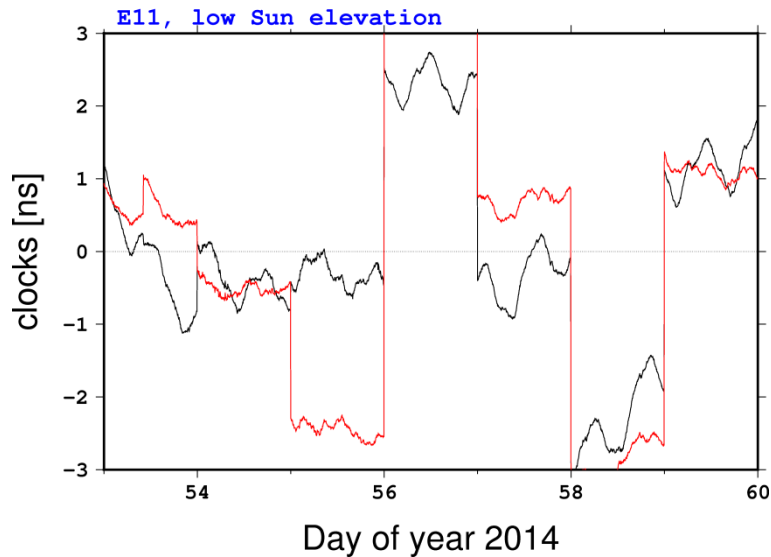

Building long clock time series: BeiDou

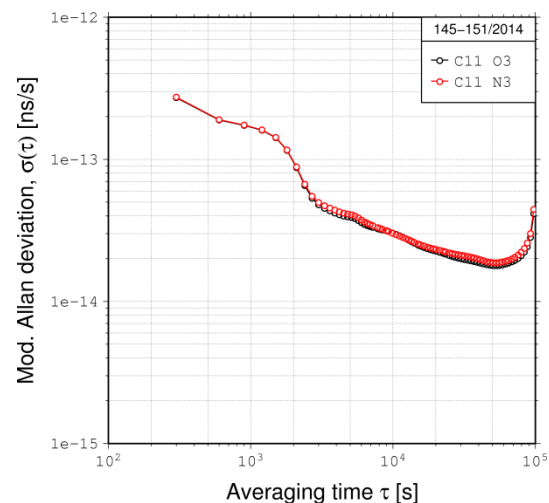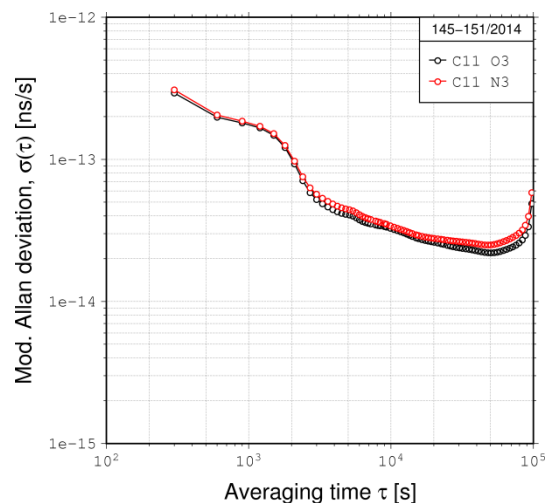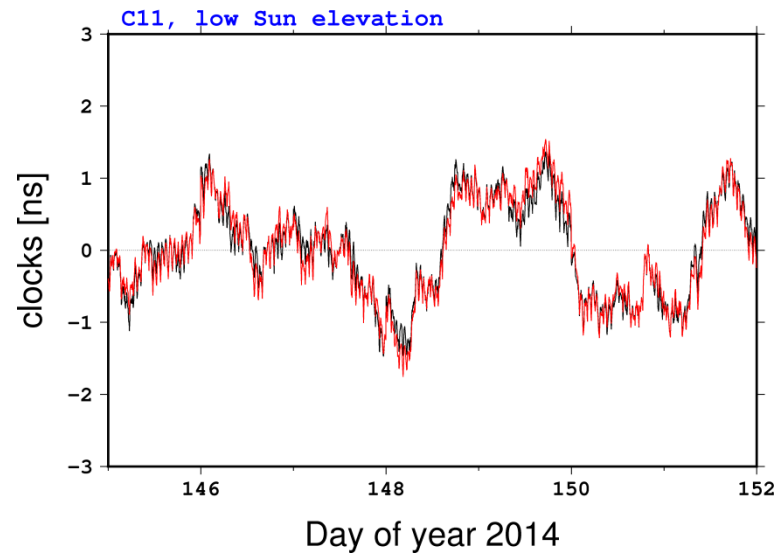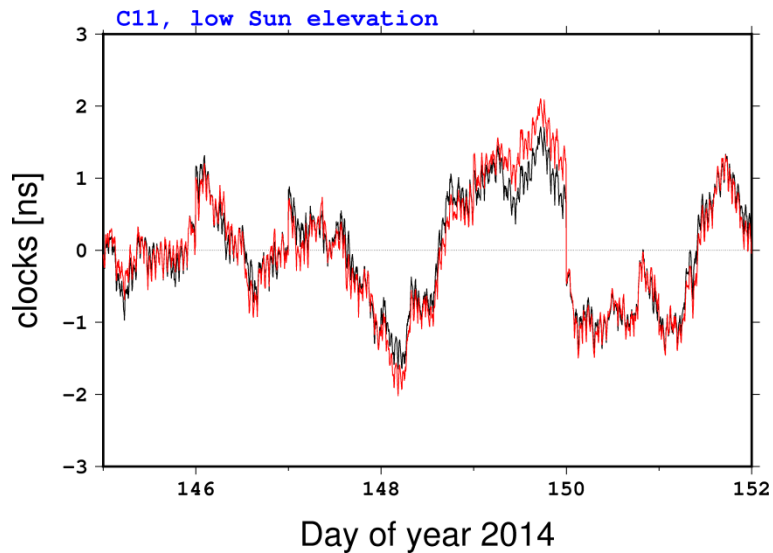

Building long clock time series: QZSS

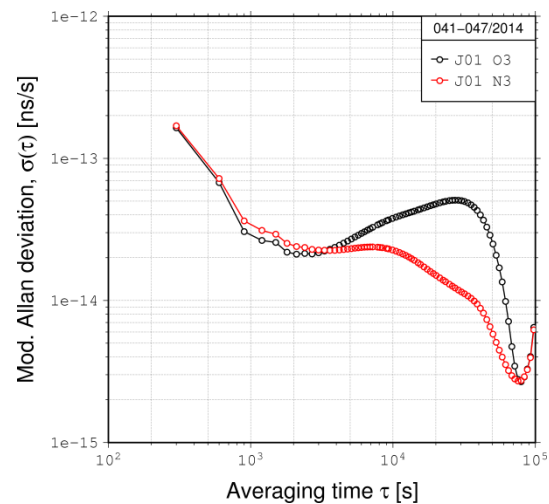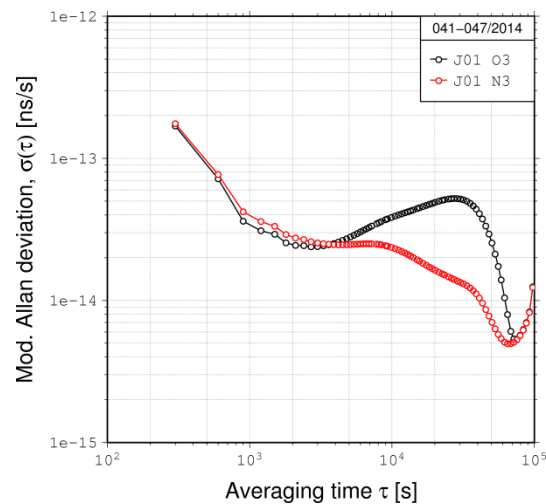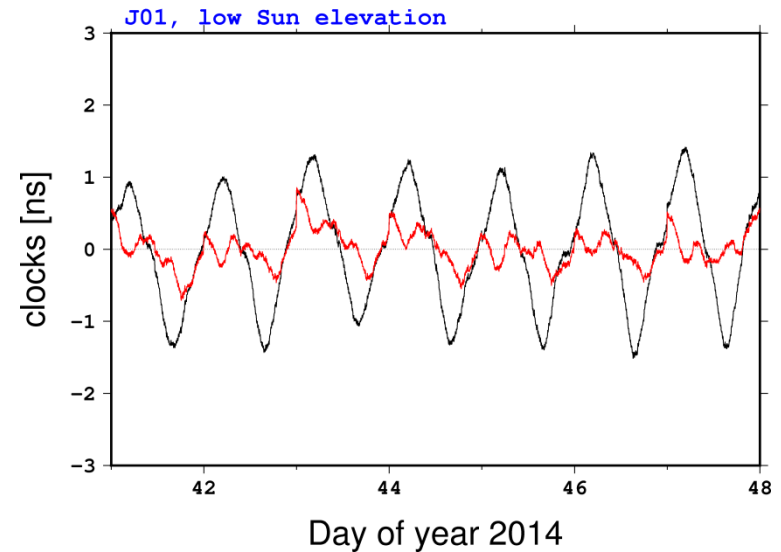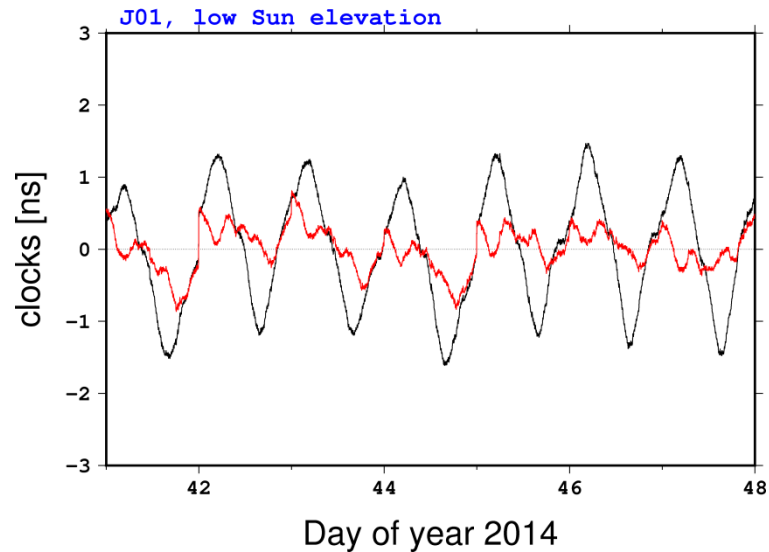

Conclusions and outlook

- The short-term variation of the ISBs was assessed for the four GNSSs considered on top of GPS
- Overall consistent performances over the systems, apart from R_715
- Periodic variations were found in the time series
- Jumps/outliers in time series remain to be understood

Thank you for your attention!